


# FILTOWER D-160

(663.160)

Voltage	(V)	400	Filter surface	(m <sup>2</sup> )	160
Motor	(kW)	2 x 4.0	No. of filter elements	(pc)	4
Ampere	(A)	12	Filter material	Dust class M antist.	
Rated frequency	(Hz)	50	Filter cleaning	Jet-Pulse	
Fuse	(A)	C16	Weight	(kg)	ca. 1,100
Intake (L x W)	(mm)	1,320 x 212	Collection bin	(Liter)	ca. 100-150
Max. neg. pressure intake	(Pa)	2,800	Dimensions (L x W x H)(mm)	2,060 x 1,515 x 3,310	
max. fan flow rate	(m <sup>3</sup> /h)	16,000	Comp. air requirement (l/impuls)	70 at 0,120s	
Soundlevel	(dBA)	75	Comp. air connection	(inch)	1/4"

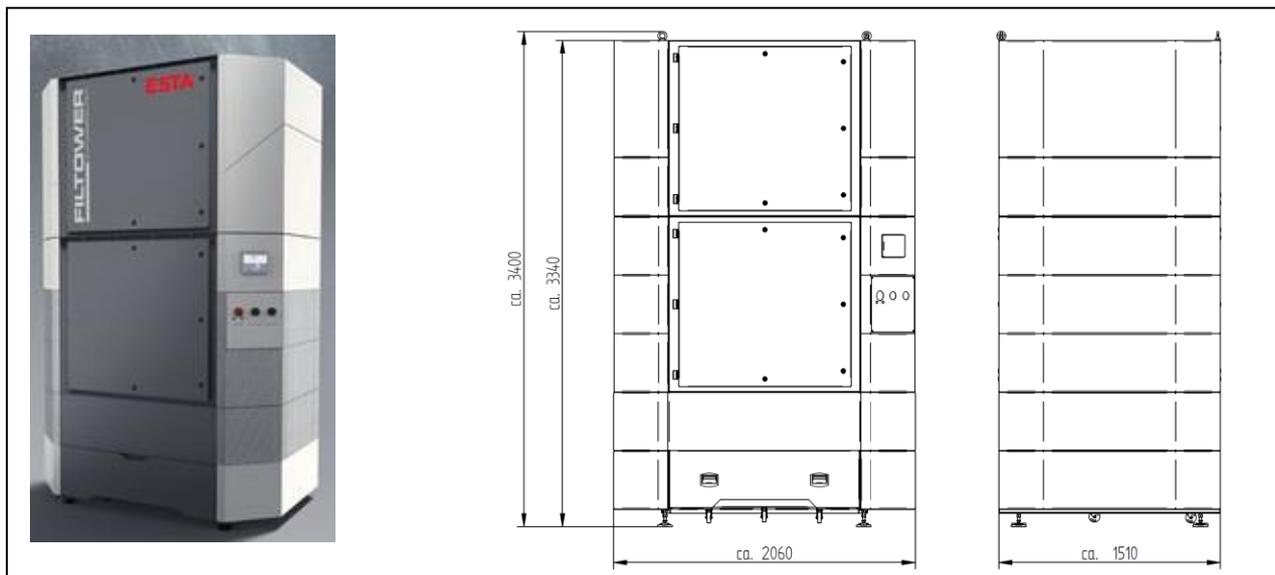

## ESTA PLUS

### Application range:

Dust extraction of dry, oil-free and pourable dusts.  
For hall ventilation.

### Your benefits at a glance:

Ready to use – the filter tower comes preassembled.  
Low operating costs thanks to cleanable permanent filter cartridges.  
Flexibility – can be moved any time to a different set-up location

### Characteristics:

Automatic jet pulse filter cleaning system  
Cleanable long life cartridge filters (dust classification M)  
Newly designed control  
Integrated impact separator

### Modifications

Activated carbon application at the outlet openings  
Control via frequency converter

State of the art: 663160-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.