


DUSTOMAT 160-S

(09.506)

Voltage	(V)	400	Max. neg. pressure	(Pa)	4.600
Motor	(kW)	3	Max. airflow	(m ³ /h)	1.850
Ampere	(A)	6,3	Dust collection bin	(Liter)	200
Rated frequency	(Hz)	50	Weight	(kg)	200
Fuse	(A)	16	Intake ø	(mm)	160
Filter surface	(m ²)	1	Dimensions (l x w x h)	(mm)	1.653 x 782 x 1.373
Filtertype	cotton with paper filter bag				

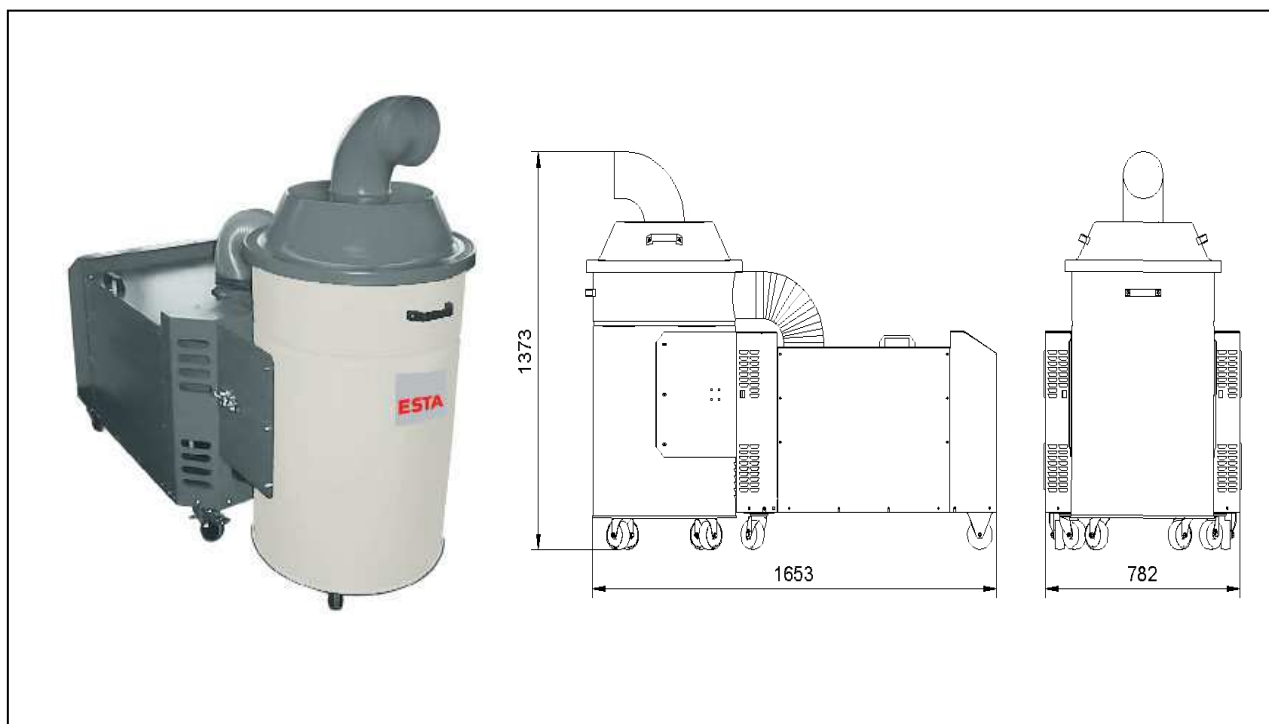

ESTA PLUS

Application range:

Extraction in textile and flocking industry, especially suitable for the extraction of sticky and fibrous dust and dust that tend to clump

Special features:

Filter:
Fabric filter element with primary paper filter bag

Optional type examination certificate

Your benefits at a glance:

Specialized dust extractor for sticky dust and dust containing long fibres

Compact design with high extraction performance

Easily replaceable paper filter bag to collect the dust

State of the art:: 09506-51-01 Subject to change without notice! For remaining questions please do not hesitate to contact us.