


SRF SK-13.0 JET

(55.153)

Voltage	(V)	400	Max. neg. pressure	(Pa)	22.000
Motor	(kW)	13,0	Max. airflow	(m ³ /h)	480
Filter surface	(m ²)	8,4	Weight	(kg)	230
Frequency	(Hz)	50	Dimension (L x W x H)	(mm)	1.690 x 780 x 1.300
Operation mode		S1	Filter cleaning		Jet-Pulse
Dust collection bin	(Liter)	30			
Intake	(mm)	125			

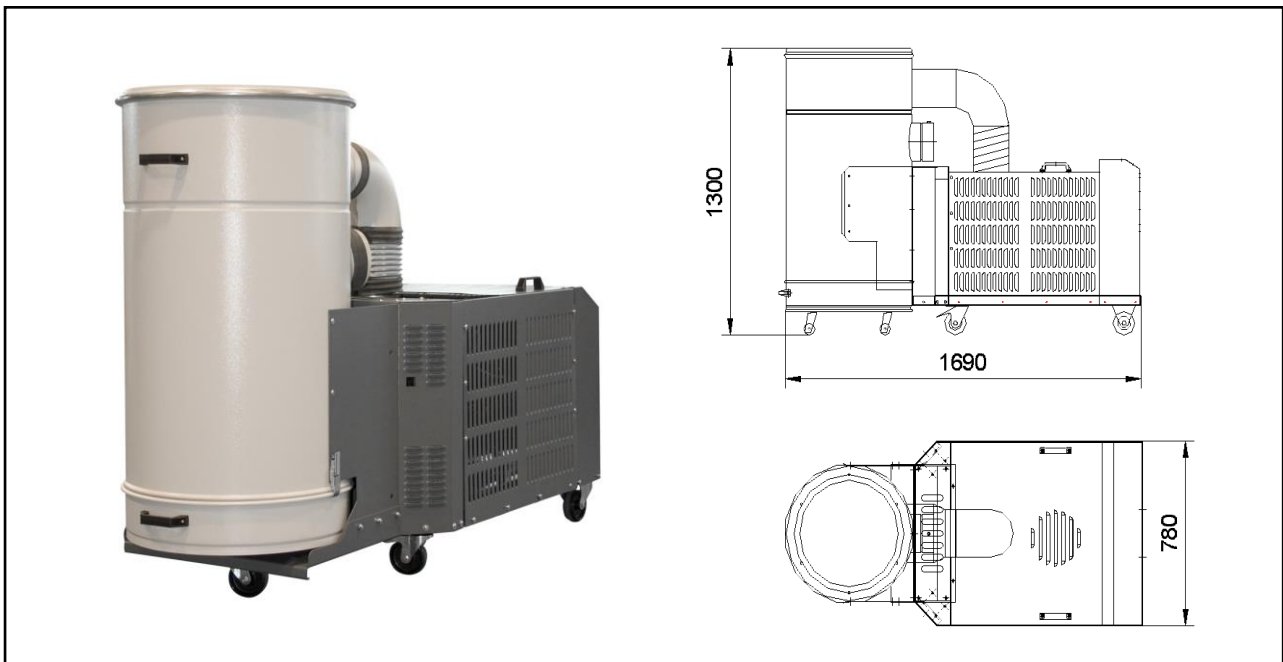

ESTA PLUS

Application range:

- Intermittent and continuous duty operation
- Direct extraction at the welding torch
- Welding extraction of non-alloy steels

Your benefits at a glance:

- High suction power for direct extraction at the welding torch
- Designed with side channel blower for continuous duty operation
- Low operation costs through the use of cleanable long life
- Cartridge filters of dust classification M

Characteristics:

- Automatic pulse-jet filter cleaning system

Optionen

- Special equipment with special painting, special voltage
- Exhaust air connection
- Different filter material possible

State of the art: 55153-51-01 Subject to change without notice! For remaining questions please do not hesitate to contact us.