


# OILMAC 400

(56.200)

Motor	(kW)	0,24	max. airflow	(m <sup>3</sup> /h)	420
Voltage	(V)	230	Sound level	(dBA)	66
Rated frequency	(Hz)	50	Weight	(kg)	ca. 50
Intake $\varnothing$	(mm)	150	Dimensions (l x w x h)	(mm)	640 x 650 x 510

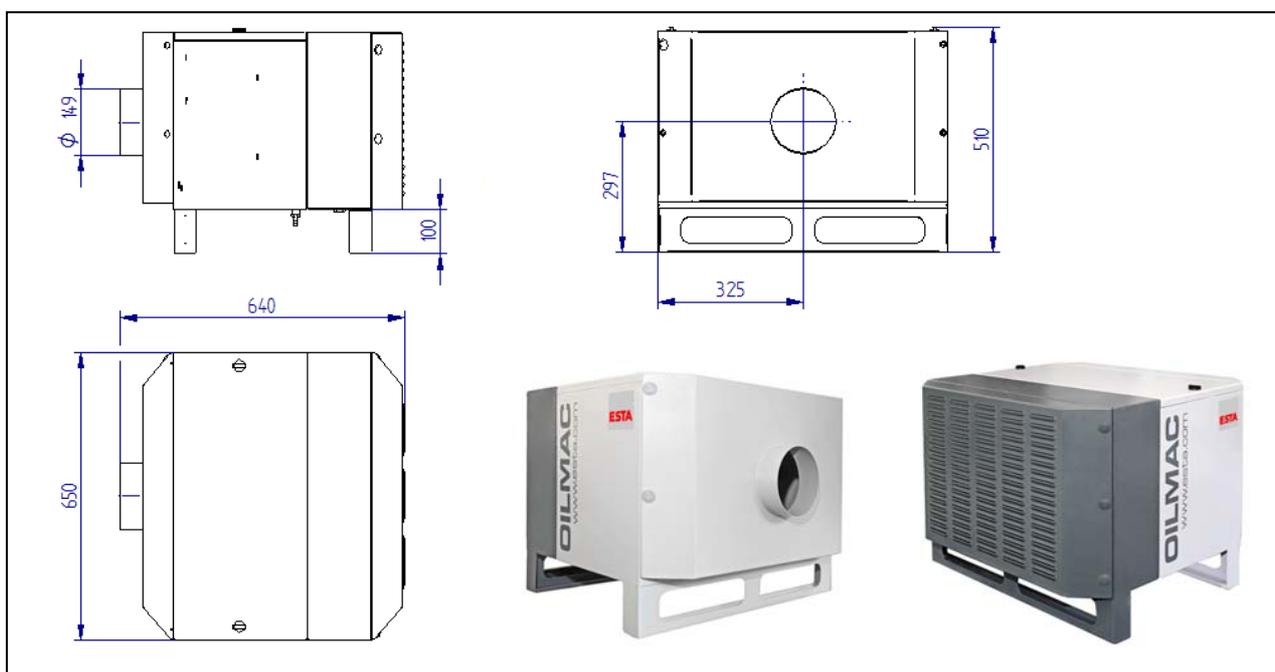

## ESTA PLUS

### Application range:

Extraction of oil and emulsion mist  
Minimal lubrication mist and smoke

### Your benefits at a glance:

Compact unit for the extraction of oil and emulsion mist  
Easy installation on top of the processing machine  
Three power ratings available  
Multi-filter system

### Characteristics:

Mechanical filtration  
With postfilter H13 for recirculation mode

### Modification:

With motor protection switch  
With potential free contact  
With special voltages  
With exhaust air connection  
With special painting  
Mobile on wheels  
With stand for adjacent installation

State of the art: 56200-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.