


FILTOWER L-200

(660.200)

Voltage	(V)	400	Filter surface	(m ²)	152
Motor	(kW)	2 x 7.5	No. of filter elements	(pc)	4
Ampere	(A)	20.2	Filter material		Dust class M
Rated frequency	(Hz)	50	Filter cleaning		NO
Fuse	(A)	C32	Weight	(kg)	ca. 1,230
Intake (L x W)	(mm)	1,295 x 295	Collection bin	(Liter)	ca. 100-150
Max. neg. pressure intake	(Pa)	2,800	Dimensions (L x W x H)(mm)		2,060 x 1,510 x 3,910
max. airflow	(m ³ /h)	20,000			
Soundlevel Lwa	(dBA)	78			

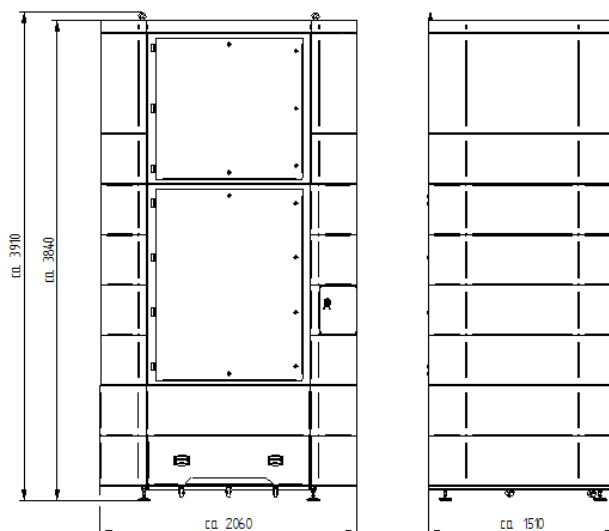

ESTA PLUS

Application range:

Extraction of oil and emulsion mist
For improving room air quality

Ihr Nutzen auf einen Blick:

Efficient fume exhaust using thermal lift from the process of machining
Ready to use – the filter tower comes preassembled
Low operating costs thanks to permanent filter cartridges
Compact design with low space requirements
Flexibility – can be moved any time to a different set-up location

Characteristics:

Long life cartridge filters (dust classification M)
Newly designed control
Integrated impact separator

Modification:

Activated carbon application at the outlet openings
Control via frequency converter

State of the art: 660200-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.