


FILTOWER D-100

(663.100)

Voltage	(V)	400	Filter surface	(m ²)	100
Motor	(kW)	2 x 3.0	No. of filter elements	(pc)	4
Ampere	(A)	8.5	Filter material		Dust class M
Rated frequency	(Hz)	50	Filter cleaning		Jet-Pulse
Fuse	(A)	C16	Weight	(kg)	ca. 900
Intake (L x W)	(mm)	1,295 x 295	Collection bin	(Liter)	ca. 100-150
Max. neg. pressure intake	(Pa)	2,800	Dimensions (L x W x H) (mm)		2,060 x 1,510 x 3,000
max. fan flow rate	(m ³ /h)	10,000	Comp. air requirement	(l/impuls)	70 at 0,120s
Soundlevel	(dBA)	68	Comp. air connection	(inch)	1/4"

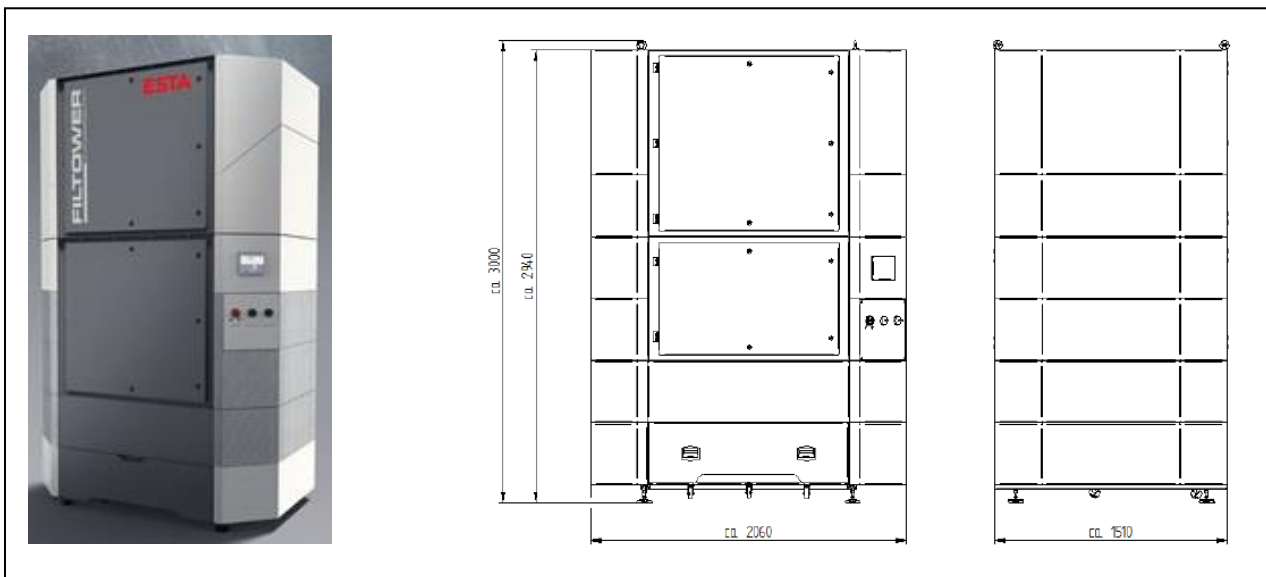

ESTA PLUS

Application range:

Dust extraction of dry, oil-free and pourable dusts.
For hall ventilation.

Your benefits at a glance:

Ready to use – the filter tower comes preassembled.
Low operating costs thanks to cleanable permanent filter cartridges.
Flexibility – can be moved any time to a different set-up location

Characteristics:

Automatic jet pulse filter cleaning system
Cleanable long life cartridge filters
(dust classification M)
Newly designed control
Integrated impact separator

Modifications

Activated carbon application at the outlet openings
Control via frequency converter

State of the art: 663100-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.