


FILTOWER D-200

(663.200)

Voltage	(V)	400	Filter surface	(m ²)	200
Motor	(kW)	2 x 7,5	No. of filter elements	(pc)	4
Ampere	(A)	20	Filter material	Dust class M antist.	
Rated frequency	(Hz)	50	Filter cleaning	Jet-Pulse	
Fuse	(A)	C32	Weight	(kg)	ca. 1,400
Intake (L x W)	(mm)	1,320 x 212	Collection bin	(Liter)	ca. 100-150
Max. neg. pressure intake	(Pa)	2,800	Dimensions (L x W x H)(mm)	2,060 x 1,515 x 3,810	
fan flow rate	(m ³ /h)	22,000	Comp. air requirement (l/impuls)	70 at 0,120s	
Soundlevel	(dBA)	77	Comp. air connection	(inch)	1/4"

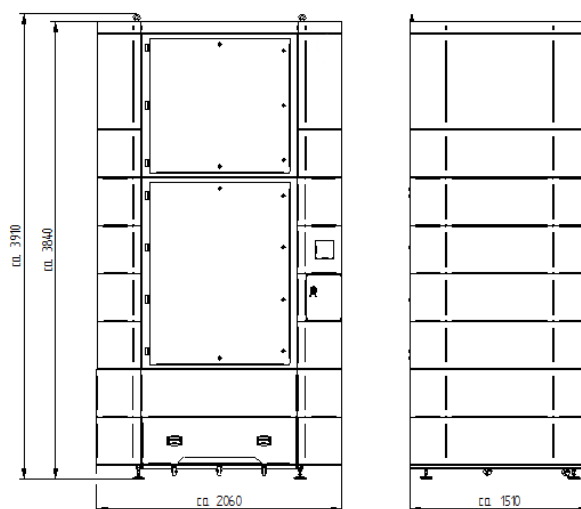

ESTA PLUS

Application range:

Dust extraction of dry, oil-free and pourable dusts.
For hall ventilation.

Your benefits at a glance:

Ready to use – the filter tower comes preassembled.
Low operating costs thanks to cleanable permanent filter cartridges.
Flexibility – can be moved any time to a different set-up location

Characteristics:

Automatic jet pulse filter cleaning system
Cleanable long life cartridge filters (dust classification M)
Newly designed control
Integrated impact separator

Modifications

Activated carbon application at the outlet openings
Control via frequency converter.

State of the art: 663200-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.