


DUSTOVAC 5.5 FM

(83.109)

Voltage	(V)	400	Filter surface	(m ²)	9,6
Motor	(kW)	5,5	No. of filter elements	(pc)	1
Ampere	(A)	28	Filter material	dust classification „M“	
Frequency	(Hz)	50	Filter cleaning	manual brush	
Fuse	(A)	32	Weight	(kg)	230
max. neg. pressure inlet	(Pa)	24,500	Intake	(mm)	70
max. airflow	(m ³ /h)	480	Dust collection bin	(liter)	200
			Dimensions (l x w x h)	(mm)	1,830 x 782 x 2,040

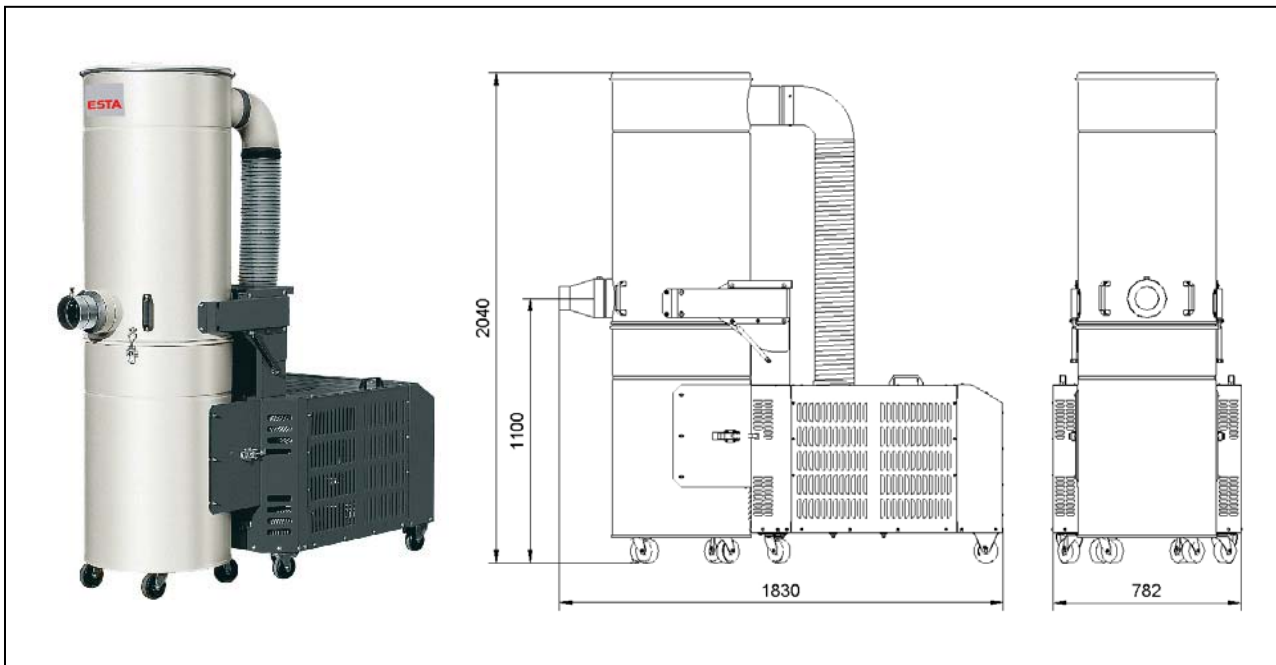

ESTA PLUS

Application range:

Dust extraction at individual or multiple workstations in industrial plants or smaller shops
Pourable dust
Dry chips

Your benefits at a glance

Side channel blower for high suction power
Low operating costs
Low noise
Patented tilt filter housing for convenient dust disposal

Characteristics:

Filter cleaning system: manual brush cleaning
Cleanable long life cartridge filters (dust classification M)

Special equipment with different filter cartridges, exhaust air socket, special voltage, special painting, pre-separator, external control via potential-free contact possible

State of the art: 83109-51-00 Subject to change without notice! For remaining questions please do not hesitate to contact us.