


DUSTOVAC 7.5 FM

(83.103)

Voltage	(V)	400	Filter surface	(m ²)	9,6
Motor	(kW)	7,5	No. of filter elements	(pc)	1
Ampere	(A)	16	Filter material	dust classification „M“	
Frequency	(Hz)	50	Filter cleaning	manual brush	
Fuse	(A)	32	Weight	(kg)	334
max. neg. pressure inlet	(Pa)	25,000	Intake	(mm)	100
max. airflow	(m ³ /h)	850	Dust collection bin	(Liter)	200
			Dimensions (l x w x h)	(mm)	1,830 x 782 x 2,040

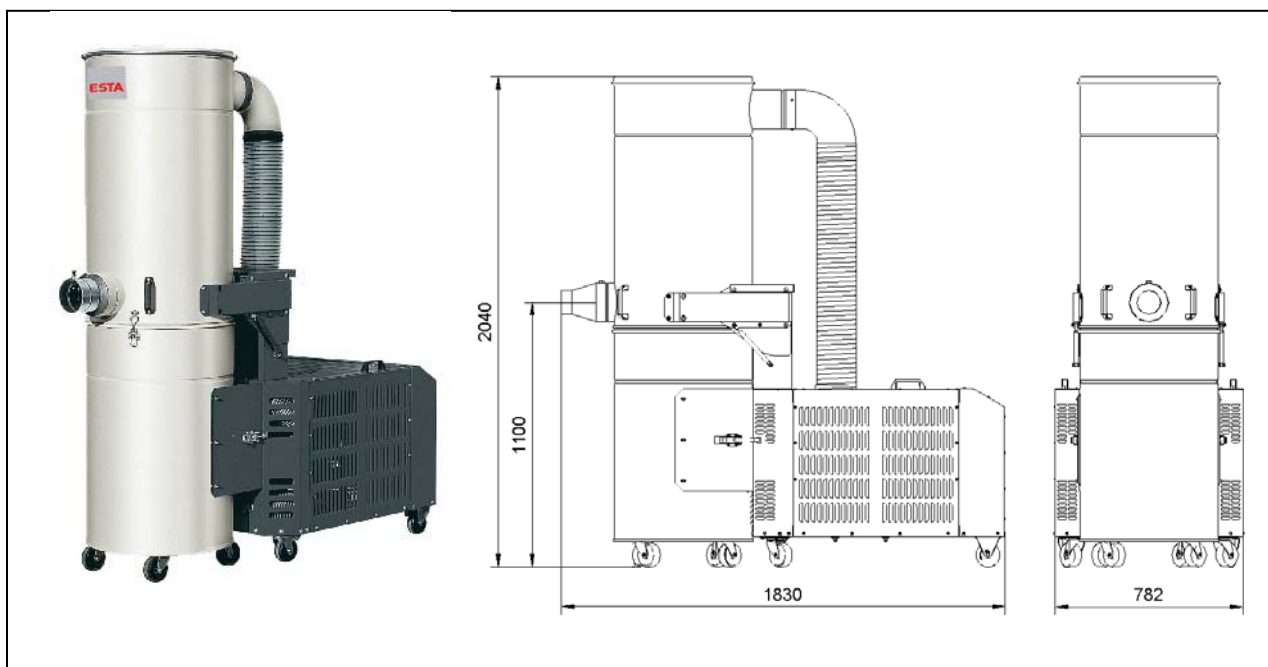

ESTA PLUS

Application range:

Dust extraction at individual or multiple workstations in
Industrial plants or smaller shops
Pourable dust
Dry chips

Your benefits at a glance

Side channel blower for high suction power
Low operating costs
Low noise
Patented tilt filter housing for convenient dust disposal

Characteristics:

Filter cleaning system: manual brush cleaning
Cleanable long life cartridge filters (dust classification M)

Special modifications with various filter cartridges, exhaust
air connection, special voltage, customized color,
pre separator, potential-free contact possible

State of the art: 83103-51-00 Subject to change without notice! For remaining questions please do not hesitate to contact us.