

ZINCO SR

PARETI MOBILI PER VERNICIATURA A SECCO
DRY SPRAY WHEEL MOUNTED WALLS



SETTORI DI IMPIEGO

- › Aspirazione e abbattimento di pigmenti ed esalazioni emessi dalla verniciatura a spruzzo eseguita con solventi sintetici, organici o ad acqua

CARATTERISTICHE TECNICHE

- › Costruzione in pannelli modulari di lamiera zincata pressopiegata
- › Dimensioni ridotte e possibilità di facile trasferimento
- › Parete filtrante in cartone inerziale e una seconda filtrazione con cassette con filtro "Paint-stop"

FORNITURA DI SERIE

- › Elettroaspiratore centrifugo antiscintilla
- › Filtro frontale in cartone inerziale H900
- › Cassetto metallico con filtro "Paint-stop"
- › Quadro elettrico cablato IP55
- › Pulsante d'emergenza
- › Cambio sezione

OPTIONAL

- › Filtro a carbone attivo
- › Aspiratore ATEX
- › Inverter aspiratore

AREAS OF USE

- › Suction and reduction of pigments and fumes emitted by spray painting carried out with synthetic, organic or water solvents

TECHNICAL FEATURES

- › Construction in modular panels of press-folded galvanized sheet
- › Small size and easy transferring
- › Inertial cardboard filtering wall and second filtration with drawers with "Paint-stop" filter

STANDARD SUPPLY


- › Anti-spark centrifugal electric fan
- › Frontal inertial cardboard filter H900
- › Metal drawer with "Paint-stop" filter
- › IP55 wired switchboard
- › Emergency button
- › Change section

OPTIONAL

- › Activated carbon filter
- › ATEX fan
- › Inverter for fan

DATI TECNICI | TECHNICAL DETAILS

Modello Model	Portata max Max flowrate m ³ /h	Potenza Power kW	Tubo di uscita Outlet tube Ø mm	Peso Weight kg	Dimensioni Dimensions A x H
ZSR15	2600	0,75	250	265	1500 x 2400
ZSR2	3400	1,1	300	320	2000 x 2500
ZSR25	5500	1,5	400	395	2500 x 2500
ZSR3	7000	2,2	450	450	3000 x 2580

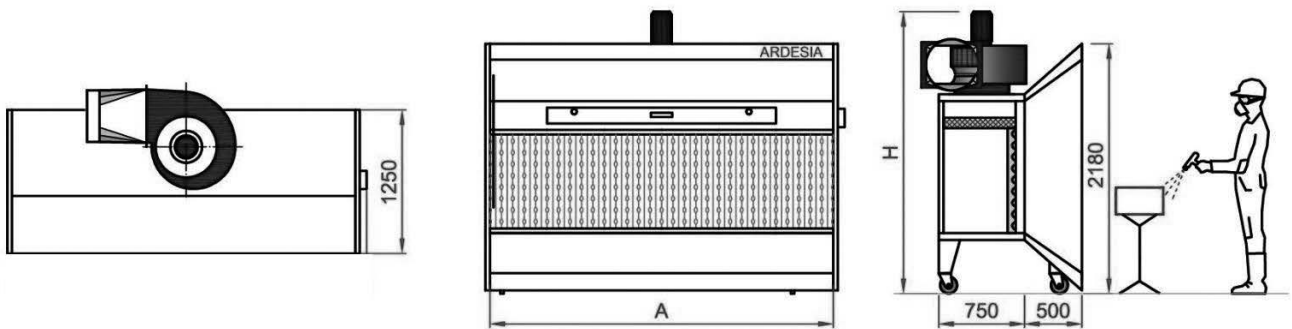

RICAMBI | REPLACEMENTS

Codice Code	Descrizione	Description
ZINCOSR/CART	Filtro frontale in cartone inerte (confezione da 0,9 x 10 mt)	Inertial cardboard filter (pack of 0.9 x 10 mt)
ZINCOSEC/PS	Filtro Paint Stop (rotolo da 1 x 20 mt)	Paint Stop filter (roll of 1 x 20 mt)
ZINCOSEC/SCARB	Carbone attivo (sacco da 25 kg)	Activated carbon (25 kg bag)
ZINCOSEC/PREFS	Prefiltro sintetico G3 per celle a carbone attivo	G3 synthetic prefilter for activated carbon cells